



Zelio Timer Relays

Near Field Communication and
conventional Timer Relays



Harmony

Discover [Harmony](#)

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. Harmony includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- [Harmony Push Buttons and Switches](#)
- [Harmony HMI Operator Terminals, IPC and EdgeBox](#)
- [Harmony Signaling Devices](#)
- [Harmony Electrical Relays](#)
- [Harmony Safety](#)

Life Is On

Schneider
Electric

Quick access to product information

Get technical information about your product

References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules

Number and type of channels	Input range	Output range	Resolution	Input format (internal)	Reference	Weight (kg)
2 voltage/current inputs	-15...+15 VDC 0...20 mA A, 20 mA	16.00V or 12.00V 4 sign	16.00V or 12.00V 15	16.00V or 12.00V 15	TM3AI2H TM3AI2G TM3AI2D	0.110 0.204 0.100
4 voltage/current inputs	-15...+15 VDC 0...20 mA A, 20 mA	16.00V or 12.00V 4 sign	16.00V or 12.00V 15	16.00V or 12.00V 15	TM3AI4H TM3AI4G TM3AI4D	0.110 0.204 0.100
4 differential temperature inputs (I, K, R, S, T, N, E, C) or 2 differential pressure (RTD, NI100, NI200, PT100, PT200)	-15...+15 VDC 0...20 mA A, 20 mA	16.00V or 12.00V 4 sign	16.00V or 12.00V 15	16.00V or 12.00V 15	TM3TI4H TM3TI4G TM3TI4D	0.110 0.204 0.100
4 differential temperature inputs (I, K, R, S, T, N, E, C), Non-isolated	-15...+15 VDC 0...20 mA A, 20 mA	16.00V or 12.00V 4 sign	16.00V or 12.00V 15	16.00V or 12.00V 15	TM3TI4H TM3TI4G TM3TI4D	0.110 0.204 0.100
8 self-diagnosing	-15...+15 VDC	12.00V 0V	12.00V 15	12.00V 15	TM3AI8H	0.110

Share Price Global (English) My Products My Documents Partner Portal

Life Is On Schneider Electric Search products, documents & more

PRODUCTS SOLUTIONS SERVICES SUPPORT ABOUT US

All products Industrial Automation and Control PLC, PAC and Dedicated Controllers Distributed Input/Output (I/O) Modules Modicon TM3

View all Modicon TM3

TM3AI2H

Module TM3 - 2 analog inputs high resolution

Show more characteristics >

Related Software >

Add to My Products Compare

Product Datasheet User guide Catalogue CAD Document

Characteristics Documents and Downloads Technical FAQs Additional Information Dimensions Drawings >

Main

range of product Modicon TM3

product or component type Analog input module


range compatibility Modicon M251

Modicon A85A

Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

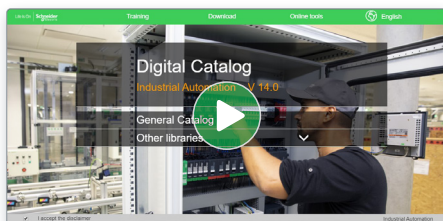

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

Industrial Automation

General Catalog

- Publications, Datasheets, PLCs, PACs & Controllers
- Books, Catalogs & Interfaces
- Signaling Devices
- HMI (Terminals and Industrial PC)
- Sensors & RFID System
- Motor Starters and Load Management
- Components for Motor Starters
- Variable Speed Drives & Soft Starters
- Motor Control & Robotics
- Interface, Measurement & Control Relays
- PLC, PAC & other Controllers

Publications, Datasheets, PLCs, PACs & Controllers

Hardware 380

Control Unit

Control Unit

- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

Training and courses

Training by domain of expertise

- Electrical Installation and Safety
- Data Center
- Industrial Automation

General contents

Zelio Timer Relays

■ General Presentation	page 2
□ Zelio RE22 Timing relays	page 2
□ Zelio NFC Timing relays	page 3
Selection guide	page 4
■ Presentation	page 6
■ Definitions	page 7
■ Selection table	page 8
■ Functions	page 10
■ References	page 23
□ Modular timing relays, solid state or relay output, width 17.5 mm/0.689 in.	page 23
□ NFC timing relays with relay output	page 23
□ Modular timing relays with diagnostic button and dial pointer, relay output, width 22.5 mm/0.886 in.	page 24
□ Modular timing relays, relay output, width 22.5 mm/0.886 in.	page 25
□ Miniature plug-in timing relays, relay output	page 26
□ Electronic timing relays, relay output, 48 x 48 mm	page 27
■ Product reference index	page 28

Zelio Timer Relays

Near Field Communication and conventional Timer Relays

Zelio Timer Relays

Innovative, ergonomic and configurable offer with single or multifunction types

Zelio Timer are timing relays designed to time events in industrial automation systems by closing and opening contacts before, during, or after a set time period. They are designed for hard-wired logic automated systems to complement the functions of industrial programmable logic controllers (PLCs).

They are suitable for a wide range of applications, including:

- Machines: single machine, and industrial automation and processes
- Buildings: lighting control, access control door locks, roller shutters
- Water segment: pumping and irrigation systems
- HVAC: fans and centralized water systems

Depending on the product model, these relays support multiple time ranges.

> Modular DIN rail mounted timing relays



RE17, RENF, RE22

> Miniature plug-in timing relays



REXL

> Panel mounted/plug-in timing relays



RE48A


The Zelio Timer relays also feature:

- Wide power supply range from 24 to 240 V $\bar{\sim}$
- Single or multi timing ranges from 0.02 s to 999 hrs
- Screw or spring connection terminals
- Relay or solid-state output
- Conformity to IEC 61812-1 and EN 61812-1 standards
- UL, CSA, GL, RCM, EAC, CCC, and China ROHS compliance
- Easy to set up with wiring diagrams on the side of the product

Zelio RE22 Timing relays

Modular relays with unique features

- > Innovative: dial pointer LED indicator and diagnostic button to assist setup and troubleshooting
- > Compact and reliable
- > Energy efficient: simple to implement, operate, and maintain
- > Compliance with standards and certifications
- > QR code embedded in instruction sheet for easy setup

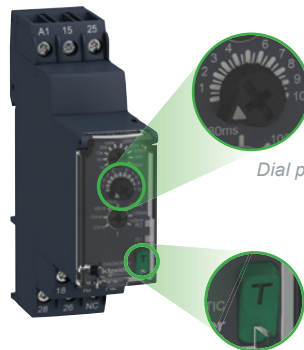

Dial pointer LED indicator

Diagnostic button

Zelio Timer → A complete range of reliable and flexible offers

Zelio NFC Timing Relay: As simple as

- 1 Install
- 2 Open app
- 3 Set parameters

Zelio NFC Timing Relays

The NFC timing relay is designed to time events in industrial automation systems by closing or opening contacts before, during, or after a set timing period.

The mobile app, Zelio NFC created for NFC timing relay is Android enabled and can be downloaded on the phone from Google Play.

Simplify product selection


- > One product reference
- > 28 timing functions
- > 2 outputs
- > Wide range of voltage supplied (24...240 V $\overline{\text{---}}$ / \sim)

Achieve unprecedented accuracy

- > Reduce error margin from 10% to 0.2%
- > Timing can be set by hour, minute, second, or millisecond



Select Function

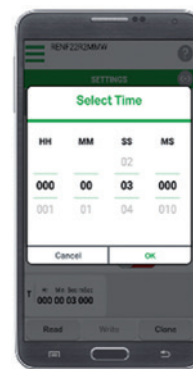

Select Time

Diagnose your relay

- > Read relay status
- > Overwrite the output
- > Manage relays without power

Count on superior security

- > Four-digit password protection



Diagnose



Security setting

Save valuable time

- > Clone settings
- > Store settings
- > Share settings through SMS

Zelio Timer Relays

Near Field Communication and conventional Timer Relays

Applications	These timing relays enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.			
Output	Solid state Timing relays with solid state output reduce the amount of wiring required (wired in series). The durability of these timing relays is independent of the number of operating cycles.		Relay Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits.	



Type	Modular and DIN rail mounted			
Connection	Screw type	Spring type	Screw type	Spring type
Time ranges	□ 7 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h		Depending on model: □ 6 ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h □ 7 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	
Timer Relay type	RE17L●●●	RE17L●●●S	RE17R●●●	RE17R●●●S
Pages	23		23	

These timing relays enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.			
Relay Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits.			



Modular and DIN rail mounted		Miniature and plug-in	Analogue and panel-mounted/plug-in
Screw type			
0.1 s to 999 h	Depending on model: □ 7 ranges: 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h □ 7 ranges: 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 10 min □ 7 ranges 0.5 s 1 s 3 s 10 s 30 s 100 s 300 s □ 1 range 30 s □ 10 ranges: 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	□ 7 ranges: 0.1 s...1 s, 1 s...10 s, 0.1 min...1 min, 1 min...10 min, 0.1 h...1 h, 1 h...10 h, 10 h...100 h	14 ranges: 1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h
RENF	RE22	REXL	RE48A
23	24	26	27

Zelio Timer Relays


Near Field Communication and conventional Timer Relays

DIN rail mounted timing relays



RE17 RENF RE22

Miniature plug-in timing relays with sockets




REXL

RXZE2M114

Panel-mounted/plug-in timing relays



RE48A

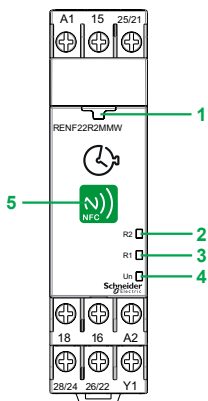

Zelio NFC Timing Relay



Zelio NFC timing relay with Smartphone mobile app

Presentation

A timing relay is a component that is designed to time events in industrial automation systems by closing or opening contacts before, during, or after a set timing period. There are three main families of timing relays:

- DIN rail mounted Modular relays (**RE17**, **RENF**, and **RE22**) designed for mounting on DIN rails in an enclosure
- Miniature plug-in relays (**REXL**) designed to be plugged into sockets
- Panel mounted/plug-in relays (**RE48A**) designed for mounting on the front panel to give users easy access to the settings

These relays have 1, 2, or 4 outputs. For some references from RE22 and RE48 range, the second output can be either timed or instantaneous. If the power is switched off during the timing period, the relay reverts to its initial position.

The Zelio Timer simple-to-use innovative NFC timing relay is enabled and controlled by the Near Field Communication technology available in present-day-smartphones.

Application examples:


- opening of automatic doors
- alarm
- lighting in toilets
- car park barriers, etc.

Zelio NFC timing relay description

- 1 Pairing indication LED (Green)
- 2 Output 2 indication LED (Amber)
- 3 Output 1 indication LED (Amber)
- 4 Power supply indication LED (Green)
- 5 NFC antenna location

Zelio NFC timing relay mobile application

To use NFC timing relay, an Android phone with NFC feature and Android firmware (version 4.1 and above) are required. The Zelio NFC app can be downloaded in the mobile with one of the following methods:

- Align the mobile phone NFC antenna to the product NFC antenna. This will take you to the Google Play page for downloading the app.
- Go to Google Play  and search for "Zelio NFC".
- Scan the below QR code to download the Zelio NFC app.



With Zelio NFC App installed in your mobile device, you can retrieve/configure and lock/unlock the product settings, and diagnose product status. All related timing function diagrams, wiring diagram and help contents can be obtained from the app.




Note: The default function for NFC Timer product is Function A (Power on-delay) and T=3s.

Definitions

The following definitions explain relay operation:

■ **Relay output:**

This is the most common type of output. When the relay is energized, the moving armature is attracted by the coil and so actuates the contacts, which change state. When the relay is de-energized, both the armature and the contacts revert to their initial position. This type of output allows complete isolation between the power supply and the output. There are three types of output contact:

CO: Changeover contact, i.e. when the relay is de-energized, the circuit between the common point C and NC is closed and when the relay is operating (coil energized), it closes the circuit between the common point C and the NO contact.	
NC: A contact that is closed without being actuated is called a Normally Closed (NC) contact.	
NO: A contact that closes when actuated is called a Normally Open (NO) contact.	

■ **Solid state output:**

This output is entirely electronic and involves no moving parts; service life is therefore increased.

■ **Breaking capacity:**

The current value that a contact is capable of breaking in specified conditions.

■ **Mechanical durability:**

The number of mechanical operating cycles of the contact or contacts.

■ **Minimum switching capacity** (or minimum breaking capacity):

This is the minimum required current that can flow through the contacts of a relay.

■ **X1/X2/Y1/Gate control input:**

Control input allows timing in progress to be interrupted without it being reset.

Functions

Timing functions are identified by letters. For the complementary functions, select the main timing function using the selection dial in the front panel; refer to functional diagrams for connection.

Main timing functions	Complementary functions (1)	Definitions
A (2)		Power on-delay relay
	Ac	On-delay and off-delay relay with control signal
	Act	On-delay and off-delay relay with control signal and pause/summation control signal
	Ad	Pulse delayed relay with control signal
	Ah	Pulse delayed relay (single cycle) with control signal
	Ak	Asymmetrical on-delay and off-delay relay with control signal
	Akt	Asymmetrical on-delay and off-delay relay with control signal and pause/summation control signal
	At	Power on-delay relay with pause/summation control signal
B (2)	Aw	Power on-delay relay with retrigger/restart control signal
		Single interval relay with control signal
C (2)	Bw	Double interval relay with control signal
		Off-delay relay with control signal
D (2)	Ct	Off-delay relay with control signal and pause/summation control signal
		Symmetrical flashing relay (starting pulse-off)
	Di (2)	Symmetrical flashing relay (starting pulse-on)
	Dit	Symmetrical flashing relay (starting pulse-on) with pause/summation control signal
	Diw	Symmetrical flashing relay (starting pulse-on) with retrigger/restart control signal
	Dt	Symmetrical flashing relay (starting pulse-off) with pause/summation control signal
H (2)	Dw	Symmetrical flashing relay (starting pulse-off) with retrigger/restart control signal
		Interval relay
	He	Pulse-on de-energization
	Ht	Interval relay with pause/summation control signal
K	Hw	Interval relay with retrigger/restart control signal
		Delay on de-energization (without auxiliary supply)
L (2)		Asymmetrical flashing relay (starting pulse-off)
	Li (2)	Asymmetrical flashing relay (starting pulse-on)
	Lit	Asymmetrical flashing relay (starting pulse-on) with pause/summation control signal
	Lt	Asymmetrical flashing relay (starting pulse-off) with pause/summation control signal

(1) Complementary functions enhance the main timing functions.
 Example: **Ac**: timing after closing and opening of control contact.
 (2) The most commonly used timing functions.

Zelio Timer Relays

Near Field Communication and conventional Timer Relays

Definitions (continued)		
Main timing functions	Complementary functions (1)	Definitions
N		Safe-guard relay
O		Delayed Safe-guard relay
P		Pulse delayed relay with fixed pulse length
	Pt	Pulse delayed relay with fixed pulse length and pause/summation control signal
Q		Star-delta relay (2 NO outputs with same common)
	Qc	Star-delta relay (1 CO output)
	Qe	Star-delta relay (1 NC + 1 NO outputs with split common)
	Qg	Star-delta relay (2 CO outputs with same common)
	Qgt	Star-delta relay (2 CO outputs with same common) with pause/summation control signal
	Qt	Star-delta relay (2 CO outputs with split common)
	Qtt	Star-delta relay (2 CO outputs with split common) with pause/summation control signal
	T	TI
Tt		Retriggerable bistable relay with control signal on
W		Interval relay with control signal off
	Wt	Interval relay with control signal off and pause/summation control signal

Selection table

Selection criteria

- **Functions** (on-delay or off-delay, counter, flashing, etc.)
- **Supply voltage** (example: $\approx 12\text{ V} \dots 240\text{ V}$)
- **Timing range** for a timing relay (for example; 0.05 s... 100 h)
- **Type of output** (contact or solid state) and required **Number of contacts**
- **Rated current** or **Breaking capacity** of contacts, expressed in Amperes. This is the maximum current that may flow through the contacts.

Functions	Timing range	Supply voltage	Type of output	Rated current	Relay		
A	0.1 s...100 h	$\approx 12\text{ V}$	2 CO contacts	5 A	REXL2TMJD		
			4 CO contacts		REXL4TMJD		
		$\approx 24\text{ V}$	2 CO contacts		REXL2TMBD		
			4 CO contacts		REXL4TMBD		
		$\sim 24\text{ V}$	2 CO contacts		REXL2TMB7		
			4 CO contacts		REXL4TMB7		
		$\sim 120\text{ V}$	2 CO contacts		REXL2TMF7		
			4 CO contacts		REXL4TMF7		
		$\sim 230\text{ V}$	2 CO contacts		REXL2TMP7		
			4 CO contacts		REXL4TMP7		
		$\approx 24 \dots 240\text{ V}$	1 solid state output	0.7 A	RE17LAMW		
					RE17LAMWS		
			0.02 s...300 h	$\approx 24 \dots 240\text{ V}$	2 CO contacts	5 A	RE48ATM12MW
		A, Ac, At, B, Bw, C, D, Di, H, Ht	0.1 s...100 h	$\approx 24 \dots 240\text{ V}$	1 solid state output	0.7 A	RE17LMBM
	RE17LMBMS						
$\approx 12\text{ V}$	1 CO contact			8 A	RE17RMJU		
	$\approx 12 \dots 240\text{ V}$				RE17RMMW		
$\approx 12\text{ V}$					RE17RMMWS		
	$\approx 12 \dots 240\text{ V}$				RE17RMMU		
$\approx 12\text{ V}$					RE17RMMUS		
	$\approx 12 \dots 240\text{ V}$				RE22R2MMU		
$\approx 12\text{ V}$					RE22R2MJU		
	$\approx 12 \dots 240\text{ V}$				RE22R2MMW		

(1) Complementary functions enhance the main timing functions.
 Example: **Ac**: timing after closing and opening of control contact.

Note: References ending with "S" are spring terminals; references without "S" are screw terminals.
 Example: RE17LAMWS is timing relay with spring terminal and RE17LAMW is timing relay with screw terminal

Zelio Timer Relays

Near Field Communication and conventional Timer Relays

Selection table (continued)						
Functions	Timing range	Supply voltage	Type of output	Rated current	Relay	
A, At	0.1 s...100 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE17RAMU	
			2 CO contacts		RE17RAMUS RE22R2AMU	
A, Aw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1AMR	
			2 CO contacts		RE22R2AMR	
A, At, Aw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1MAMR	
A, At, B, C, D, Di, H, Ht	0.1 s...10 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE17RMEMU	
					RE17RMEMUS	
A, B, C, Di	0.02 s...300 h	≈ 24...240 V	2 CO contacts	5 A	RE48AML12MW	
A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Dit, H, Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, TI, Tt, W	0.1 s...999 h	≈ 24...240 V	2 CO contacts	8 A	RENF22R2MMW	
A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, Qg, Qgt, Qt, Qtt, W, Wt	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2MYMR	
A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt, Ac, Act	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1MYMR	
A1, A2, H1, H2	0.02 s...300 h	≈ 24...240 V	2 CO contacts	5 A	RE48AMH13MW	
Ac	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2ACMR	
Ac, Act	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1ACMR	
Ad, Ah, N, O, P, Pt, TI, Tt, W	0.1 s...100 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE17RMXMU	
			2 CO contacts		RE17RMXMUS RE22R2MXMU	
Ak, Akt	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1AKMR	
B	0.1 s...100 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE17RBMU	
					RE17RBMUS	
C	0.1 s...100 h	≈ 24...240 V	1 solid state output	0.7 A	RE17LCBM	
		≈ 24 V/≈ 24...240 V	1 CO contact		8 A	RE17LCBMS RE17RCMU RE17RCMUS
	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2CMR	
C, Ct	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1CMR	
D, Dw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1DMR	
			2 CO contacts		RE22R2DMR	
H	0.1 s...100 h	≈ 24...240 V	1 solid state output	0.7 A	RE17LHBM RE17LHBMS	
H, Hw	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1HMR	
			2 CO contacts		8 A	RE22R2HMR
H, Ht	0.1 s...100 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE17RHMU	
					RE17RHMUS	
K	0.05 s...10 min	≈ 24...240 V	1 CO contact	5 A	RE22R1KMR	
			2 CO contacts		RE22R2KMR	
K, He	0.05 s...300 h	≈ 24...240 V	1 CO contact	5 A	RE22R1MKMR	
L, Li	0.1 s...100 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE17RLMU	
			1 solid state output		0.7 A	RE17LLBM RE17LLBMS
			≈ 12 V		1 CO contact	8 A
	0.02 s...300 h	≈ 24...240 V	2 CO contacts	5 A	RE48ACV12MW	
L, Lt, Li, Lit	0.05 s...300 h	≈ 24...240 V	1 CO contact	8 A	RE22R1MLMR	
Q	0.1 s...100 h	≈ 24 V/≈ 24...240 V	1 CO contact	8 A	RE22R1QMU	
		≈ 230...240 V, ≈ 380...440 V			RE22R1QMQ	
Qc	0.05 s...300 s	≈ 24 V, ≈ 24...240 V	1 CO contact	8 A	RE22R1QCMU	
Qe	0.3 s...30 s	≈ 380...415 V	2 CO contacts	8 A	RE22R2QEMT	
		≈ 24...240 V			RE22R2QEMR	
Qg	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2QGMR	
Qt	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2QTMR	
W, Wt	0.05 s...300 h	≈ 24...240 V	2 CO contacts	8 A	RE22R2MWMR	

Note: References ending with "S" are spring terminals; references without "S" are screw terminals.

Example: RE17LAMWS is timing relay with spring terminal and RE17LAMW is timing relay with screw terminal

Zelio Timer Relays


Near Field Communication and conventional Timer Relays

Functions

U: Supply
R: Relay or solid state output
R1/R2: 2 timed outputs
R2 inst.: Second output is instantaneous if the correct position is selected
T: Timing period

X1/X2/Y1: Control contacts
Ta: Adjustable on-delay
Tr: Adjustable off-delay

Function diagram:




Function A: Power on-delay relay

1 output



2 outputs

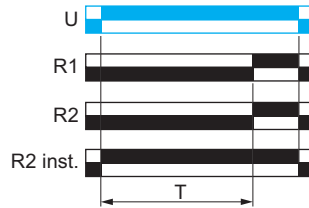


The timing period T begins on power-on.

At the end of this timing period, the output(s) R close(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Ac: On-delay and off-delay relay with control signal

1 output

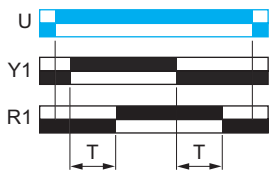

2 outputs

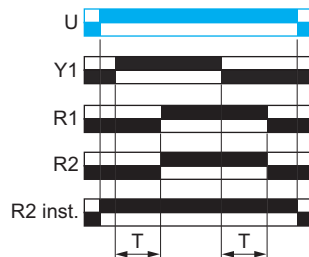

After power-on, and the closure of Y1 the timing period T starts.

At the end of this timing period, the output(s) R close(s).


When Y1 opens, the timing period T starts.

At the end of this timing period T, the output(s) R revert(s) to its/their initial position.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Act: On-delay and off-delay relay with control signal and pause/summation control signal

1 output



After power-on and the closure of Y1 the timing period T starts and it can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

When Y1 opens, the timing T starts and it can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

$$T = t_1 + t_2 + \dots$$


$$T = t'_1 + t'_2 + \dots$$

Function Ad: Pulse delayed relay with control signal

1 output

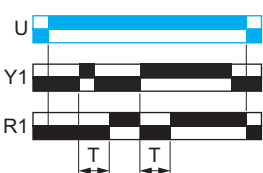

2 outputs

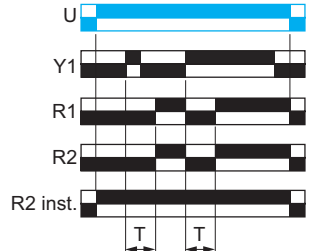

After power-on, pulsing or maintaining Y1 starts the timing T.

At the end of this timing period T, the output(s) R close(s).


The output(s) R will revert to its/their initial position the next time Y1 is pulsed or maintained.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function Ah: Pulse delayed relay (single cycle) with control signal

1 output



2 outputs

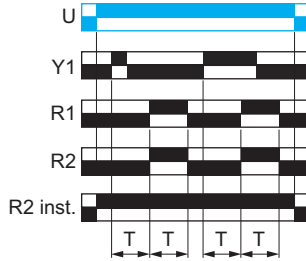


After power-on, pulsing or maintaining control contact Y1 starts the timing T. A single cycle then starts with 2 timing periods T of equal duration (start with output(s) R in initial position).

The output(s) R closes (s) state at the end of the first timing period T and reverts to its/their initial position at the end of the second timing period T. Control contact Y1 should be reset in order to re-start the single flashing cycle.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Ak: Asymmetrical on-delay and off-delay relay with control signal

1 output

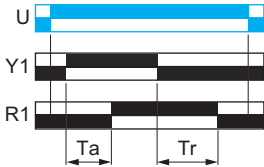

2 outputs

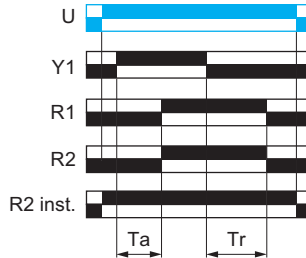

After power-on and the closure of control contact Y1, timing starts for a period Ta.


At the end of this timing period Ta, the output(s) R close(s).

A second timing period Tr starts when control contact Y1 re-opens. At the end of this timing period Tr, the output R reverts to its initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Akt: Asymmetrical on-delay and off-delay relay with control signal and pause/summation control signal

1 output

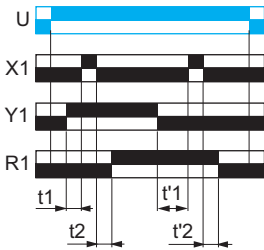

$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$


After power-on and the closure of Y1, timing starts for a period Ta and can be interrupted/paused each time X1 closes. When the cumulative total time elapsed reaches the preset value Ta, the output R closes.

A second timing period Tr starts when Y1 re-opens and can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value Tr, the output R open(s).

Function At: Power on-delay relay with pause/summation control signal

1 output

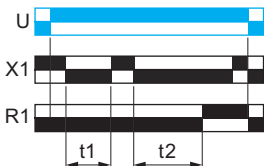


$$T = t_1 + t_2 + \dots$$

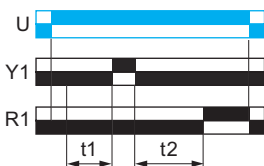


$$T = t_1 + t_2 + \dots$$

2 outputs

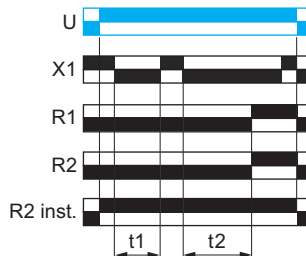

$$T = t_1 + t_2 + \dots$$

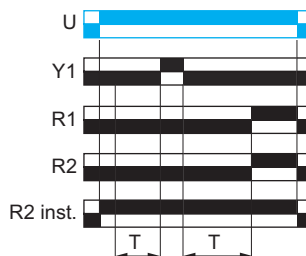

$$T = t_1 + t_2 + \dots$$

After power-on, the timing period T starts. Timing can be interrupted/paused each time X1 closes.

Note: For RENF22R2MMW, RE17●, RE22R2AMU, RE22R2MMW, RE22R2MMU, and RE22R2MJU, timing can be interrupted/paused each time Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Zelio Timer Relays

Near Field Communication and conventional Timer Relays


Functions (continued)

Function Aw: Power on-delay relay with retrigger/restart control signal

1 output



2 outputs




The timing period T starts on power-on. At the end of the timing period T, the output(s) R close(s).

Closing of the Y1 makes the output(s) R open. Opening of Y1 restarts timing period T. At the end of the timing period T, the output(s) R close(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function B: Single interval relay with control signal

1 output



2 outputs




After power-on, pulsing or maintaining Y1 starts the timing T.

The output(s) R close(s) for the duration of the timing period T and then open(s).


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Bw: Double interval relay with control signal

1 output



2 outputs




After power-on, transition of Y1 (either from open to closed or vice-versa) will cause the output(s) R to close(s) for the duration of the timing period T and then revert(s) to its/their initial state.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function C: Off-delay relay with control signal

1 output



2 outputs



After power-on and closure of the Y1, the output(s) R close(s).


When Y1 re-opens, timing T starts.

At the end of the timing period, output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function Ct: Off-delay relay with control signal and pause/summation control signal

1 output



$$T = t_1 + t_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$

After power-on and the closure of Y1, the output(s) R close(s).

When Y1 re-opens, timing starts and can be interrupted/paused each time X1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function D: Symmetrical flashing relay (starting pulse-off)

1 output



2 outputs

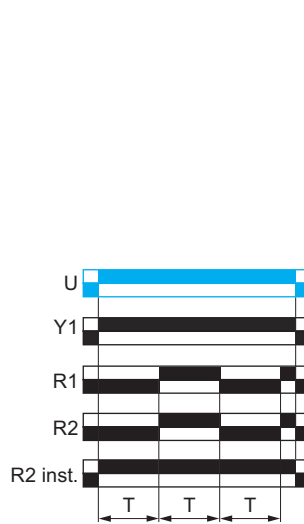


After power-on, repetitive cycle starts with 2 timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

This cycle is repeated indefinitely until the power supply is removed.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Note: Function D with Y1 is only for the RE17 range and RE22R2MJU, RE22R2MMU, and RE22R2MMW references.




Function Di: Symmetrical flashing relay (starting pulse-on)

1 output



2 outputs




After power-on, repetitive cycle starts with 2 timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Dt: Symmetrical flashing relay (starting pulse-off) with pause/summation control signal


1 output



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) at its/their initial state for timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s).

The output(s) R will remain in the closed state for the same timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R revert(s) to its/their initial state.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Note: For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.


Zelio Timer Relays

Near Field Communication and conventional Timer Relays

Functions (continued)

Function Dit : Symmetrical flashing relay (starting pulse-on) with pause/summation control signal


1 output



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$

$$T = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) when output(s) R close(s) for timing period T and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, then the output(s) revert(s) to its/their initial state.

The output(s) R will remain in this initial state for the same timing period T and the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s). This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Note: For RNF22R2MMW, timing can be interrupted/paused each time Y1 closes.

Function Dw: Symmetrical flashing relay (starting pulse-off) with retrigger/restart control signal

1 output



2 outputs




After power-on, output(s) R start(s) with open state for timing period T then close(s) for the same timing period T. This cycle is repeated indefinitely until the power supply is removed.

At any state of the output(s) R, when Y1 closes and then re-opens, the output(s) R open(s) and restart(s) the same operation as described at the beginning.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Diw: Symmetrical flashing relay (starting pulse-on) with retrigger/restart control signal

1 output



2 outputs



After power-on, output(s) R closes(s) for timing period T and open(s) for the same timing period T. This cycle is repeated indefinitely until the power supply is removed.


At any state of the output(s) R when Y1 closes and then re-opens, the output(s) R close(s) and restart(s) the same operation as described at the beginning.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function H: Interval relay

1 output



2 outputs




After power-on, timing period T starts and the output(s) R close(s).

At the end of the timing period T, output(s) R revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function He: Pulse-on de-energization

1 output




After power-on > 80 ms followed by power-off, the output R closes for the duration of a timing period T and then open(s).


After power-on < 80 ms followed by power-off, the output R closes and opens before the end of the timing period T as it will not be able to sustain this state for the timing period T.

Function Ht: Interval relay with pause/summation control signal

1 output




$$T = t_1 + t_2 + \dots$$




$$T = t_1 + t_2 + \dots$$

2 outputs



$$T = t_1 + t_2 + \dots$$



$$T = t_1 + t_2 + \dots$$

After power-on, output(s) R close(s) and timing period T starts, the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T, the output(s) R revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Note: For RE17●, RE22R2MMW, RENF22R2MMW, RE22R2MMU, and RE22R2MJU, timing can be interrupted/paused each time Y1 closes.

Function Hw: Interval relay with retrigger/restart control signal

1 output



2 outputs



After power-on, output(s) R close(s) and timing period T starts. At the end of the timing period T, the output(s) R open(s).

At any state of the output(s) R when Y1 closes and then re-opens, the output(s) R close(s) and restart(s) the same operation as described at the beginning.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Zelio Timer Relays

Near Field Communication and conventional Timer Relays


Functions (continued)

Function K: Delay on de-energization (without auxiliary supply)

1 output



2 outputs



After power-on, the output(s) R close(s).

After power-off, timing period T starts and, at the end of this period, the output(s) R open(s).


The power-on $> T_k$ is necessary to sustain the timing period T.

There are 3 references with different T_k as follows:


- (a) RE22R1KMR $\rightarrow T_k = 1\text{ s}$
- (b) RE22R2KMR $\rightarrow T_k = 1\text{ s}$
- (c) RE22R1MKMR $\rightarrow T_k = 80\text{ ms}$

Function L: Asymmetrical flashing relay (starting pulse-off)

1 output



1 output




After power-on, repetitive cycle consisting of 2, independently adjustable timing periods T_a and T_r starts.

Each timing period corresponds to a different state of the output R.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


2 outputs



Note: Function L with Y1 is only for the RE17 range.

Function Li: Asymmetrical flashing relay (starting pulse-on)

1 output



1 output




After power-on, repetitive cycle consisting of 2, independently adjustable timing periods T_a and T_r starts.

Each timing period corresponds to a different state of the output R.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


2 outputs



Functions (continued)

Function Lt: Asymmetrical flashing relay (starting pulse-off) with pause/summation control signal


1 output



$$T_r = t_1 + t_2 + \dots$$

$$T_a = t'_1 + t'_2 + \dots$$

2 outputs



$$T_r = t_1 + t_2 + \dots$$

$$T_a = t'_1 + t'_2 + \dots$$

After power-on, output(s) R start(s) at its/their initial state for timing duration T_r and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T_r , the output(s) R close(s).

The output(s) R will remain at its close state for timing duration T_a , and the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T_a , then output(s) R reverts to its/their initial state.

This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Lit: Asymmetrical flashing relay (starting pulse-on) with pause/summation control signal


1 output



$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$

2 outputs



$$T_a = t_1 + t_2 + \dots$$

$$T_r = t'_1 + t'_2 + \dots$$

After power-on, output(s) R close(s) for timing duration T_a and the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T_a , the output(s) R open(s).

The output(s) R will remain open for timing duration T_r , the timing can be interrupted/paused each time X1/Y1 closes.


When the cumulative total time elapsed reaches the preset value T_r , then output(s) R close(s).

This cycle is repeated indefinitely until the power supply is removed.


Note: For RENF22R2MMW, timing can be interrupted/paused each time Y1 closes.

Function N: Safe-guard relay

1 output



2 outputs



After power-on and at the beginning of the control pulse Y1, the output(s) R close(s).

If the interval between two Y1 control pulses is greater than the set timing period T, timing elapses normally and the output(s) R open(s) at the end of the timing period T.

If the interval is less than the set timing period, the output(s) R remain(s) closed until this condition is met.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Zelio Timer Relays

Near Field Communication and conventional Timer Relays


Functions (continued)

Function O: Delayed Safe-guard relay

1 output



2 outputs



An initial timing period T begins on power-on. At the end of this timing period, the output(s) R close(s).


At the beginning of the control pulse Y1, the output(s) R opens(s) and remain(s) in that state if the interval between two control pulses is less than the value of the set timing period T.

Otherwise, the output(s) R close(s) at the end of the timing period T.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function P: Pulse delayed relay with fixed pulse length

1 output



P = 500 ms

2 outputs




The timing period T starts on power-on.

At the end of this period, the output(s) R close(s) for a fixed time P and then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function Pt: Pulse delayed relay with fixed pulse length and pause/summation control signal

1 output



T = t1 + t2 + ...
P = 500 ms

2 outputs




After power-on, timing period T starts (it can be interrupted by operating control contact Y1).

When the cumulative total time elapsed reaches the preset value T, the output(s) R close(s) for a fixed time P then revert(s) to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function Q: Star-delta relay (2 NO outputs with same common)

2 outputs



t = 20, 40, 60, 80, 100, 120, 140 ms selectable

After power-on, the output R1 closes such that it closes the star contactor and the main contactor and the timing T starts (star connection timing period starts).


At the end of the timing period T, the output R1 opens such that it opens the star contactor and starts transition time t.

At the end of the transition time, the output R2 closes such that it closes the delta contactor.

Functions (continued)

Function Qc: Star-delta relay (1 CO output)

1 output



t = 50 ms


After power-on, the output R initializes at its initial state to close the star contactor and main contactor and the timing T starts (star connection timing period starts).

At the end of the timing period T, output R closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R reverts to its initial state such that it closes the delta contactor.

Function Qe: Star-delta relay (1 NC + 1 NO outputs with split common)

2 outputs




After power-on, the output R1 is at its initial state such that it closes the star contactor and the main contactor and the timing T starts (star connection timing period starts).

At the end of the timing period T, output R1 opens such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

Function Qg: Star-delta relay (2 CO outputs with same common)

2 outputs



t = 50 ms (RE22R2MYMR)

t = 20, 40, 60, 80, 100, 120, 140 ms selectable (RE22R2QGMR)


After power-on, output R1 closes the star contactor and the main contactor, and the timing T starts (star connection time period starts).

At the end of the timing period T, output R1 reverts to its initial state such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

Function Qt: Star-delta relay (2 CO outputs with split common)

2 outputs



t = 50 ms (RE22R2MYMR)

t = 20, 40, 60, 80, 100, 120, 140 ms selectable (RE22R2QTMR)

t = 20, 30, ...ms (RENF22R2MMW)

After power-on, the outputs R1 and R2 initialize at its/their initial state such that they close the star contactor and the main contactor and the timing T starts (Star connection time duration starts).


At the end of the timing period T, the output R1 closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, the output R2 closes such that it closes the delta contactor.

Functions (continued)

Function Qgt : Star-delta relay (2 CO outputs with same common) with pause/summation control signal

2 outputs



$T = t_1 + t_2 + \dots$
 $t = 50 \text{ ms}$

After power-on, output R1 closes the star contactor and the main contactor, and the timing T starts (star connection time period starts).


During star connection time, the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, output R1 reverts to its initial state such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.

Function Qtt : Star-delta relay (2 CO outputs with split common) with pause/summation control signal

2 outputs



$T = t_1 + t_2 + \dots$
 $t = 50 \text{ ms}$
 $t = 20, 30, \dots \text{ms (RENF22R2MMW)}$

After power-on, the outputs R1 and R2 initialize at its/their initial state such that they close the star contactor and the main contactor and the timing T starts (star connection timing period starts).

During star connection time, the timing can be interrupted/paused each time X1/Y1 closes.

When the cumulative total time elapsed reaches the preset value T, output R1 closes such that it opens the star contactor and starts transition time t.

At the end of the transition time, output R2 closes such that it closes the delta contactor.


Note: For RNF22R2MMW, timing can be interrupted/paused each time Y1 closes.

Function TI: Bistable relay with control signal on

1 output



2 outputs



After power-on and closure of Y1, the output(s) R close(s). The subsequent closure of Y1 causes the output(s) R to revert(s) to its/their initial state.


This cycle is repeated indefinitely until the power supply is removed.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Functions (continued)

Function Tt: Retriggerable bistable relay with control signal on

1 output



2 outputs



After power-on and closure of Y1, the output(s) R close(s) and the timing T starts.


If the interval between 2 consecutive closures of Y1 is greater than the preset value T, the output(s) R will toggle from its/their present state at the end of the timing period.

If the interval between 2 consecutive closures of Y1 is less than the preset value T, the output(s) R toggle from its/their present state as soon as Y1 closes without completing duration T.


The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function W: Interval relay with control signal off

1 output



2 outputs




After power-on and closure of contact Y1, followed by opening of the control contact Y1, the output(s) R close(s) for a timing period T.

At the end of this timing period the output(s) revert to its/their initial state.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function Wt: Interval relay with control signal off and pause/summation control signal

1 output



$$T = t_1 + t_2 + \dots$$

2 outputs




After power-on and at the end of control pulse Y1, the output(s) R close(s) for a timing period T. Timing can be interrupted/paused each time X1 closes.

When the cumulative total time elapsed reaches the preset value T, the output(s) R open(s).

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


RE48ATM12MW

Function A: Power on-delay relay




RE48ACV12MW

Function L: Asymmetrical flashing relay (starting pulse-off)

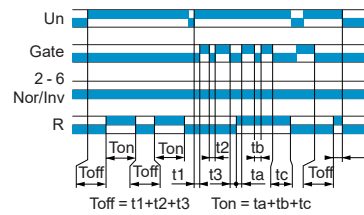


Function Li: Asymmetrical flashing relay (starting pulse-on)

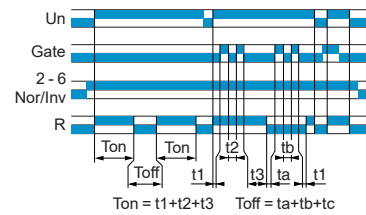


RE48AML12MW


Function A: Power on-delay relay

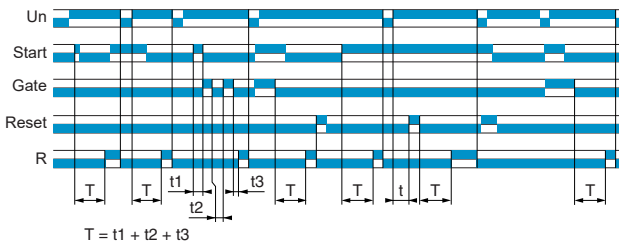


Function B: Interval relay with control signal

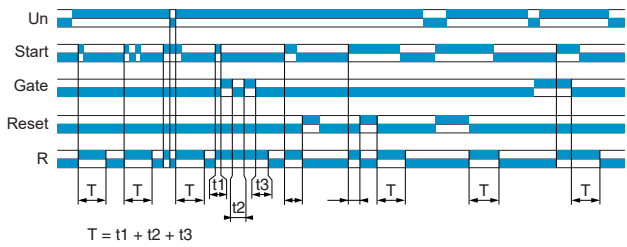

Function C: Off-delay relay with control signal

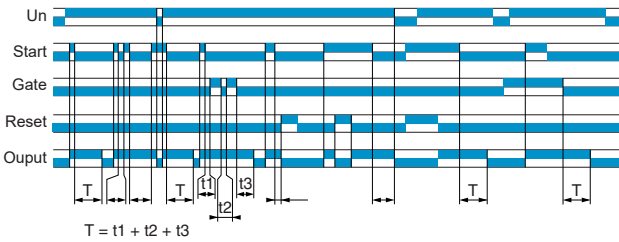


Function Di: Symmetrical flashing relay (starting pulse-on)

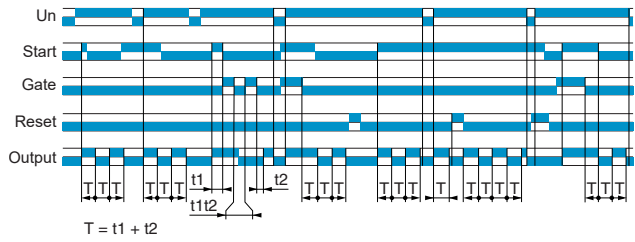


RE48AMH13MW

Functions A1, A2: Delay on energization

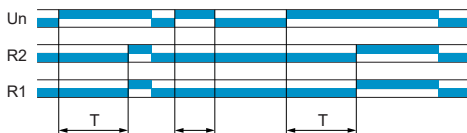

Functions H1, H2: Pulse-on energization

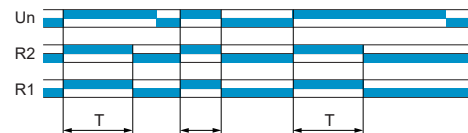

Note: If A1 or H1 is selected, only R2 is timed, R1 is instantaneous.

Zelio Timer Relays

Near Field Communication and conventional Timer Relays

Modular timing relays, solid state or relay output, width 17.5 mm/0.689 in.

Solid state output

- Multifunction, dual function, or single function
- Multi-range (7 selectable ranges)
- Multivoltage
- Solid state output: 0.7 A
- Screw and spring terminals



RE17LAMW



RE17LMBMS

Relay output, 1 CO contact

- Dual function or single function
- Multi-range (7 selectable ranges)
- Multivoltage
- 1 relay output: 8 A
- Screw and spring terminals
- State indication by 1 LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RE17RAMU



RE17RMMWS

2 CO contacts

- Multifunction
- Multiple timing ranges
- Multivoltage
- 2 relay outputs: 8 A - 250 V
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RENF22R2MMW

Modular timing relays with solid state output

Single function

Timing ranges	Functions	Voltages V	Reference	Weight kg/lb
7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A	~ 24...240	RE17LAMW RE17LAMWS	0.060/0.132 0.050/0.110
	H	~ 24...240	RE17LHBM RE17LHBMS	0.060/0.132 0.050/0.110
	C	~ 24...240	RE17LCBM RE17LCBMS	0.060/0.132 0.050/0.110

Dual function

7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	L, Li	~ 24...240	RE17LLBM RE17LLBMS	0.060/0.132 0.050/0.110
--	-------	------------	---	----------------------------

Multifunction

7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, D, Di, Ac, Bw	~ 24...240	RE17LMBM RE17LMBMS	0.060/0.132 0.050/0.110
--	-----------------------------------	------------	---	----------------------------

Modular timing relays with relay output

Single function

Timing ranges	Functions	Voltages V	Reference	Weight kg/lb
1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	B	~ 24/~ 24...240	RE17RBMU RE17RBMUS	0.070/0.154 0.060/0.132
	C	~ 24/~ 24...240	RE17RCMU RE17RCMUS	0.070/0.154 0.060/0.132

Dual function

1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At	~ 24/~ 24...240	RE17RAMU RE17RAMUS	0.070/0.154 0.060/0.132
	H, Ht	~ 24/~ 24...240	RE17RHMU RE17RHMUS	0.070/0.154 0.060/0.132
	L, Li	~ 24/~ 24...240	RE17RLMU RE17RLMUS	0.070/0.154 0.060/0.132
		~ 12	RE17RLJU	0.070/0.154

Multifunction

1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, D, Di, Ac, Bw	~ 12	RE17RMJU	0.070/0.154
		~ 24/~ 24...240	RE17RMMU RE17RMMUS	0.070/0.154 0.060/0.132
		~ 12...240	RE17RMMW RE17RMMWS	0.070/0.154 0.060/0.132
	Ad, Ah, N, O, P, Pt, Ti, Tt, W	~ 24/~ 24...240	RE17RMXMU RE17RMXMUS	0.070/0.154 0.060/0.132

1 s, 10 s, 1 min, 10 min, 1 h, 10 h	A, At, B, C, H, Ht, D, Di	~ 24/~ 24...240	RE17RMEMU RE17RMEMUS	0.070/0.154 0.060/0.132
-------------------------------------	---------------------------	-----------------	---	----------------------------

NFC Timing relays with relay output

Multifunction

Timing ranges	Functions	No. of relay outputs	V		Reference	Weight kg/lb
			Voltages	V		
0.1 s to 999 h	A, Ac, Ad, Ah, Ak, At, B, Bw, C, D, Di, Dt, Di, H, Ht, L, Li, Lt, Lit, N, O, P, Pt, Qt, Qtt, Ti, Tt, W	2	~ 24...240	~ 24...240	RENF22R2MMW	0.0904/0.1993

Note: References ending with "S" are spring terminals; references without "S" are screw terminals.
Example: RE17LAMWS is timing relay with spring terminal and RE17LAMW is timing relay with screw terminal

Zelio Timer Relays

Near Field Communication and conventional Timer Relays
Modular timing relays with diagnostic button and dial pointer, relay output, width 22.5 mm/0.886 in.

Output 1 CO and 2 CO contacts

- Multifunction, dual function, or single function
- Multiple timing ranges (up to 10 switchable ranges)
- Multivoltage
- 1 or 2 relay outputs
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option
- Diagnostic button (1) and dial pointer LED indicator



RE22R2QTMR



RE22R2KMR



RE22R2QEMR



RE22R2HMR



RE22R1MYMR

Modular timing relays with relay output

Single function

Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight
			V		
10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	Ac	2	≈ 24...240	RE22R2ACMR	0.105/ 0.231
	Qg	2	≈ 24...240	RE22R2QGMR	0.105/ 0.231
	Qt	2	≈ 24...240	RE22R2QTMR	0.105/ 0.231
7 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 10 min	K	1	≈ 24...240	RE22R1KMR (1) (2)	0.100/ 0.220
		2	≈ 24...240	RE22R2KMR (1) (2)	0.100/ 0.220
7 selectable timing ranges 0.5 s, 1 s, 3 s, 10 s, 30 s, 100 s, 300 s	Qc	1	≈ 24/≈ 24...240	RE22R1QCMU	0.080/ 0.176
	Single range selection 30 s	Qe	2	≈ 24...240	RE22R2QEMR
		2	≈ 380...415	RE22R2QEMT	0.090/ 0.198

Dual function

10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	A, Aw	1	≈ 24...240	RE22R1AMR	0.100/ 0.220
		2	≈ 24...240	RE22R2AMR	0.105/ 0.231
	C, Ct	1	≈ 24...240	RE22R1CMR	0.100/ 0.220
	C	2	≈ 24...240	RE22R2CMR	0.105/ 0.231
	Ac, Act	1	≈ 24...240	RE22R1ACMR	0.100/ 0.220
	Ak, Akt	1	≈ 24...240	RE22R1AKMR	0.100/ 0.220
7 selectable timing ranges 0.5 s, 1 s, 3 s, 10 s, 30 s, 100 s, 300 s	D, Dw	1	≈ 24...240	RE22R1DMR	0.100/ 0.220
		2	≈ 24...240	RE22R2DMR	0.105/ 0.231
	H, Hw	1	≈ 24...240	RE22R1HMR	0.100/ 0.220
		2	≈ 24...240	RE22R2HMR	0.105/ 0.231
10 selectable timing ranges 1 s, 3 s, 10 s, 30 s, 100 s, 300 s, 30 min, 300 min, 30 h, 300 h	Wt, W	2	≈ 24...240	RE22R2MWMR	0.105/ 0.231
	K, He	1	≈ 24...240	RE22R1MKMR (1) (2)	0.100/ 0.220
	A, At, Aw	1	≈ 24...240	RE22R1MAMR	0.100/ 0.220
	A, At, Aw, Ac, Act, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt,	1	≈ 24...240	RE22R1MYMR	0.100/ 0.220
	A, At, Aw, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, Qg, Qgt, Qt, Qtt, W, Wt	2	≈ 24...240	RE22R2MYMR	0.105/ 0.231
	L, Li, Lt, Lit	1	≈ 24...240	RE22R1MLMR	0.100/ 0.220

(1) The diagnostic button is not available for the K function related references (RE22R1KMR, RE22R2KMR, and RE22R1MKMR).

(2) 1 or 2 relay outputs: 5 A - 250 V

Zelio Timer Relays

Near Field Communication and conventional Timer Relays
Modular timing relays, relay output, width 22.5 mm/0.886 in.

Output 1 CO and 2 CO contacts

- Multifunction, dual function, or single function
- Multiple timing ranges (7 switchable ranges)
- Multivoltage
- 1 or 2 relay outputs: 8 A - 250 V
- Screw terminals
- State indication by LED
- Option of supplying a load in parallel
- 3-wire sensor control option



RE22R1QMU



RE22R2AMU



RE22R2MXMU

Modular timing relays with relay output

Single function

Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight
			V		kg/lb
7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	Q	1	≡ 24/∼ 24...240	RE22R1QMU	0.090/ 0.198
			∼ 230/380	RE22R1QMQU	0.090/ 0.198

Dual function

7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At	2	≡ 24/∼ 24...240	RE22R2AMU	0.090/ 0.198
--	-------	---	-----------------	-----------	-----------------

Multifunction

7 selectable timing ranges 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 100 h	A, At, B, C, H, Ht, Di, D, Ac, Bw	2	≡ 24/∼ 24...240	RE22R2MMU	0.090/ 0.198
			∼ 12	RE22R2MJU	0.090/ 0.198
			∼ 12...240	RE22R2MMW	0.090/ 0.198
	Ad, Ah, N, O, P, Pt, Tl, Tt, W	2	≡ 24/∼ 24...240	RE22R2MXMU	0.090/ 0.198


Zelio Timer Relays

Near Field Communication and conventional Timer Relays


Miniature plug-in timing relays, relay output

Output 2 CO and 4 CO contacts

- Miniature and plug-in (21 x 27 mm/0.827 x 1.062 in.)
- Single function: function A = delay on energization
- Rated current ~ 5 A
- 7 timing ranges (0.1 s to 100 h)
- Multivoltage
- Excellent immunity to interference
- Power on and relay energized indication by 2 LEDs



REXL2TM●●



REXL4TM●●



RXZE2M114

Miniature plug-in timing relays with relay output

Single function						
Timing ranges	Functions	No. of relay outputs	Voltages	Reference	Weight	
			V		kg/lb	
7 switchable ranges 0.1 s...1 s 1 s...10 s 0.1 min...1 min 1 min...10 min 0.1 h...1 h 1 h...10 h 10 h...100 h	A	2	--- 12	REXL2TMJD	0.050/ 0.110	
			--- 24	REXL2TMBD	0.050/ 0.110	
			~ 24 (50/60 Hz)	REXL2TMB7	0.050/ 0.110	
			~ 120 (50/60 Hz)	REXL2TMF7	0.050/ 0.110	
			~ 230 (50/60 Hz)	REXL2TMP7	0.050/ 0.110	
			4	--- 12	REXL4TMJD	0.050/ 0.110
			--- 24 (1)	REXL4TMBD	0.050/ 0.110	
~ 24 (50/60 Hz) (1)	REXL4TMB7	0.050/ 0.110				
~ 120 (50/60 Hz)	REXL4TMF7	0.050/ 0.110				
~ 230 (50/60 Hz)	REXL4TMP7	0.050/ 0.110				

Sockets for relays

Contact terminal arrangement	For use with relays	Connection	Unit reference (2)	Weight kg/lb
Mixed (3)	REXL2TM●●, REXL4TM●●	Screw clamp	RXZE2M114 (5)	0.048/ 0.106
	REXL2TM●●, REXL4TM●●	Connector	RXZE2M114M (6)	0.056/ 0.123
Separate (4)	REXL2TM●●	Connector	RXZE2S108M	0.070/ 0.154
	REXL4TM●●	Connector	RXZE2S114M	0.058/ 0.128
	REXL2TM●● REXL4TM●●	Spring clamp	RXZE2S114S	0.070/ 0.154

(1) For --- 48 V supply, additional resistor 560 Ω 2 W/--- 24 V.
For ~ 48 V, additional resistor 390 Ω 4 W/~ 24 V.

(2) These products are sold in lots of 10.

(3) The inputs are mixed with the relay's power supply terminals, with the outputs being located on the opposite side of the socket.

(4) The inputs and outputs are separated from the relay power supply.

(5) Thermal current I_{th}: 10 A

(6) Thermal current I_{th}: 12 A

Zelio Timer Relays

Near Field Communication and conventional Timer Relays
Electronic timing relays, relay output, 48 x 48 mm

Output 2 CO contacts

- Time unit selector knob
- Multifunction, single function, or dual function
- Multirange
- Multivoltage
- 2 relay outputs, 5 A
- Panel-mounted or plug-in
- LED indication



RE48ATM12MW



RE48AMH13MW



RUZC3M




RE48ASOC11AR



RE48ASOC8SOLD



RE48ASOC11SOLD



RE48ASETCOV



RE48AIPCOV

Electronic Timing relays with relay output

8-pin relay

Timing ranges	Function	No. of relay outputs	Voltages	Reference	Weight
1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h	A	2	≈ 24...240 V	RE48ATM12MW	0.140/ 0.309
	A1, A2, H1, H2	2 of which 1 instantaneous	≈ 24...240 V	RE48AMH13MW	0.140/ 0.309

11-pin relay

1.2 s, 3 s, 12 s, 30 s, 120 s, 300 s, 12 min, 30 min, 120 min, 300 min, 12 h, 30 h, 120 h, 300 h	L, Li	2	≈ 24...240 V	RE48ACV12MW	0.140/ 0.309
	A, B, C, Di	2	≈ 24...240 V	RE48AML12MW	0.140/ 0.309

Sockets

Description	Number of pins	For use with relays	Sold in lots of	Unit reference	Weight
IP 20 sockets with connection by connector and mixed contact terminals (1)	8	RE48ATM12MW, RE48AMH13MW	10	RUZC2M	0.054/ 0.119
	11	RE48ACV12MW, RE48AML12MW	10	RUZC3M	0.054/ 0.119
IP 20 socket with screw terminal connections on rear face	11	RE48ACV12MW, RE48AML12MW	1	RE48ASOC11AR	—

Connectors and protective cover

IP 20 solder connectors	8	RE48ATM12MW, RE48AMH13MW	1	RE48ASOC8SOLD	—
	11	RE48ACV12MW, RE48AML12MW	1	RE48ASOC11SOLD	—

Setting protection cover	—	RE48ATM12MW, RE48ACV12MW, RE48AML12MW, RE48AMH13MW	1	RE48ASETCOV	—
--------------------------	---	--	---	-------------	---

Protective cover IP 64	—	RE48ATM12MW, RE48ACV12MW, RE48AML12MW, RE48AMH13MW	1	RE48AIPCOV	—
------------------------	---	--	---	------------	---

(1) The inputs are mixed with the relay's power supply terminals, with the outputs being located on the opposite side of the socket.

R	
RE17LAMW	23
RE17LAMWS	23
RE17LHBM	23
RE17LHBMS	23
RE17LCBM	23
RE17LCBMS	23
RE17LLBM	23
RE17LLBMS	23
RE17LMBM	23
RE17LMBMS	23
RE17RBMU	23
RE17RBMUS	23
RE17RCMU	23
RE17RCMUS	23
RE17RAMU	23
RE17RAMUS	23
RE17RHMU	23
RE17RHMUS	23
RE17RLMU	23
RE17RLMUS	23
RE17RLJU	23
RE17RMJU	23
RE17RMMU	23
RE17RMMUS	23
RE17RMMW	23
RE17RMMWS	23
RE17RMXMU	23
RE17RMXMUS	23
RE17RMEMU	23
RE17RMEMUS	23
RENF22R2MMW	23
RE22R2ACMR	24
RE22R2QGMR	24
RE22R2QTMR	24
RE22R1KMR	24
RE22R2KMR	24
RE22R1QCMU	24
RE22R2QEMR	24
RE22R2QEMT	24
RE22R1AMR	24
RE22R2AMR	24
RE22R1CMR	24
RE22R2CMR	24
RE22R1ACMR	24
RE22R1AKMR	24
RE22R1DMR	24
RE22R2DMR	24
RE22R1HMR	24
RE22R2HMR	24
RE22R2MWMR	24
RE22R1MKMR	24
RE22R1MAMR	24
RE22R1MYMR	24
RE22R2MYMR	24
RE22R1MLMR	24
RE22R1QMU	25
RE22R1QMQ	25
RE22R2AMU	25
RE22R2MMU	25
RE22R2MJU	25
RE22R2MMW	25
RE22R2MXMU	25
REXL2TMJD	26
REXL2TMBD	26
REXL2TMB7	26
REXL2TMF7	26
REXL2TMP7	26
REXL4TMJD	26
REXL4TMBD	26
REXL4TMB7	26
REXL4TMF7	26
REXL4TMP7	26
RXZE2M114	26
RXZE2M114M	26
RXZE2S108M	26
RXZE2S114M	26
RXZE2S114S	26
RE48ATM12MW	27
RE48AMH13MW	27
RE48ACV12MW	27
RE48AML12MW	27
RUZC2M	27
RUZC3M	27
RE48ASOC11AR	27
RE48ASOC8SOLD	27
RE48ASOC11SOLD	27
RE48ASETCOV	27
RE48AIPCOV	27

Life Is On



Learn more about our products at
www.schneider-electric.com/relays

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA5ED2130103EN
March 2020 - V10.0